


Intrada SEC

250 x 4.6 mm


Application

Polystyrenesulfonic acid

ポリスチレンスルホン酸



polystyrenesulfonic acid

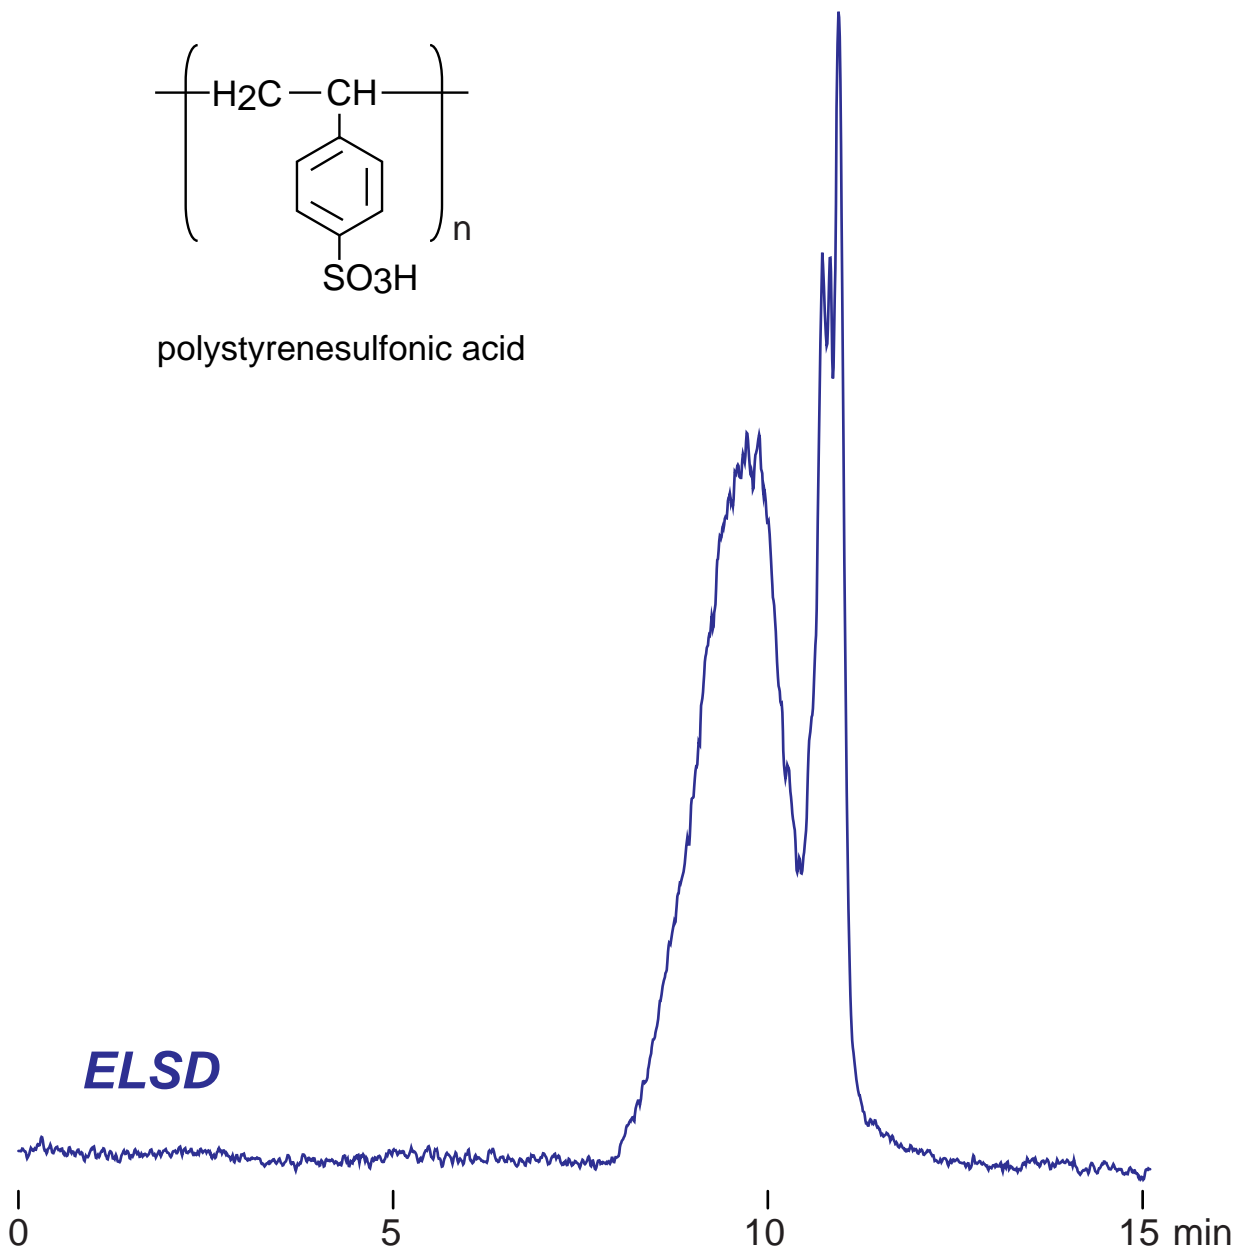

*Intrada SEC, 250 x 4.6 mm
 100mM ammonium formate
 0.3 mL/min (5MPa), 37°C
 10 µL, (1mg/mL, 100M HCOONH₄)
 ELSD (Spray Chamber 50°C, Drift Tube 100°C)*